





Fixture	Vivid S 160 Static		Vivid S 160 Pixel				Vivid S 160 RGB	Vivid S 160 Dynamic White	Vivid Wave Mini	Vivid Contour 12V	Vivid Contour 24V	
	R/A/O	G/B/2200K-5700K	RGB	Single Color	RGBW	W+WW	RGB	W/WW	R/A/G/B/2200K-5700K	R/A/G/B/2200K-5700K	R/A	G/B/2200K-5700K
Colors												
Voltage	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	12V DC	24V DC	24V DC
Cutting Units	4.92in (125mm)	3.28in (83.3mm)	4.92in (125mm)	4.92in (125mm)	4.92in (125mm)	3.94in (100mm)	3.94in (100mm)	3.28in (83.3mm)	3.28in (83.3mm)	1.64in (41.7mm)	4.92in (125mm)	3.28in (83.3mm)
W/Ft (W/m)	2.19W/ft (7.2W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	4.57W/ft (15W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	1.37W/ft (4.5W/m)	1.37W/ft (4.5W/m)	1.07W/ft (3.5W/m)	1.37W/ft (4.5W/m)
Dimensions	0.45in x 0.83in (11.5mm x 21mm)		0.45in x 0.83in (11.5mm x 21mm)				0.45in x 0.83in (11.5mm x 21mm)	0.45in x 0.83in (11.5mm x 21mm)	0.39in x 0.39in (10mm x 10mm)	0.35in x 0.71in (9mm x 18mm)	0.35in x 0.71in (9mm x 18mm)	
Min. Bend Diameter	4.72in (120mm)		4.72in (120mm)				4.72in (120mm)	4.72in (120mm)	3.94in (100mm)	3.54in (90mm)	3.54in (90mm)	
Bend Direction	Side	Top	Side	Top	Top	Top	Side	Top	Side	Top	Side	Top
Max Run Length	49.21ft (15m)	32.81ft (10m)	32.81ft (10m)	32.81ft (10m)	16.4ft (5m)	32.81ft (10m)	22.97ft (7m)	32.81ft (10m)	32.81ft (10m)	24.61ft (7.5m)	65.62ft (20m)	49.21ft (15m)
Double Feed	98.43ft (30m)	65.62ft (20m)	65.62ft (20m)	65.62ft (20m)	32.81ft (10m)	65.62ft (20m)	45.93ft (14m)	65.62ft (20m)	65.62ft (20m)	49.21ft (15m)	131.23ft (40m)	98.43ft (30m)

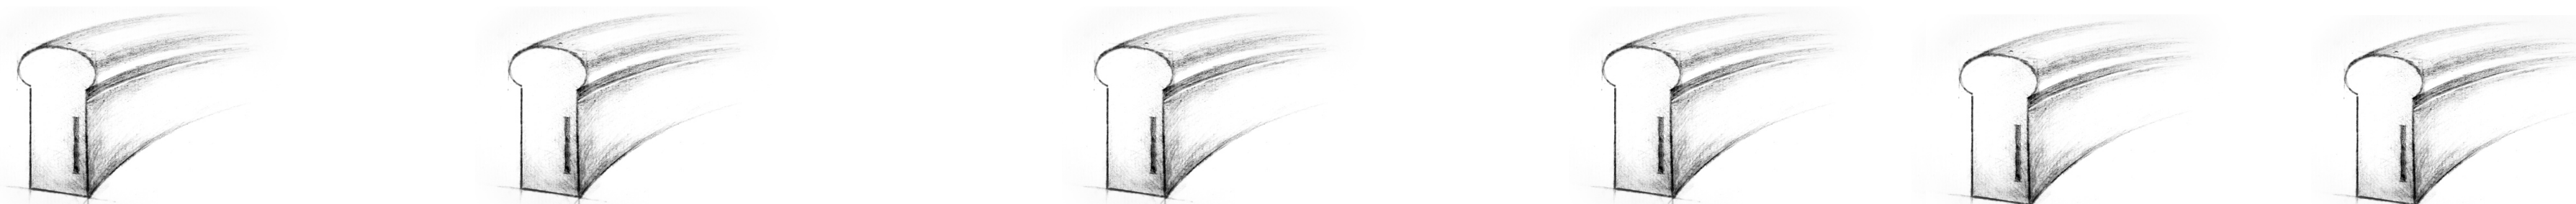

Fixture	Vivid Basic		Vivid S 270 Static			Vivid S 270 Pixel				Vivid S 270 RGB	Vivid S 270 Dynamic White	Landscape Flex	
	R/A	G/B/2200K-5700K	R/A/O	G/B/2200K-5700K	Pink	RGB	Single Color	RGBW	W+WW	RGB	W/WW	R/G/B/A/2700K-6500K	
Colors													
Voltage	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	12V AC	
Cutting Units	4.92in (125mm)	3.28in (83.3mm)	4.92in (125mm)	3.28in (83.3mm)	3.94in (100mm)	4.92in (125mm)	4.92in (125mm)	4.92in (125mm)	3.94in (100mm)	3.94in (100mm)	3.28in (83.3mm)	1.64in (41.7mm)	
W/Ft (W/m)	1.07W/ft (3.5W/m)	1.37W/ft (4.5W/m)	2.19W/ft (7.2W/m)	3.66W/ft (12W/m)	2.74W/ft (9W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	4.57W/ft (15W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	1.37W/ft (4.5W/m)	
Dimensions	0.45in x 1.02in (11.5mm x 26mm)		0.45in x 1.14in (11.5mm x 29mm)			0.45in x 1.14in (11.5mm x 29mm)				0.45in x 1.14in (11.5mm x 29mm)	0.45in x 1.14in (11.5mm x 29mm)	0.45in x 1.02in (11.5mm x 26mm)	
Min. Bend Diameter	4.72in (120mm)		4.72in (120mm)			4.72in (120mm)				4.72in (120mm)	4.72in (120mm)	4.72in (120mm)	
Bend Direction	Side	Top	Side	Top	Top	Side	Top	Top	Top	Side	Top	Side	Top
Max Run Length	65.62ft (20m)	49.21ft (15m)	49.21ft (15m)	32.81ft (10m)	32.81ft (10m)	32.81ft (10m)	32.81ft (10m)	16.4ft (5m)	32.81ft (10m)	22.97ft (7m)	32.81ft (10m)	24.61ft (7.5m)	
Double Feed	131.23ft (40m)	98.43ft (30m)	98.43ft (30m)	65.62ft (20m)	65.62ft (20m)	65.62ft (20m)	65.62ft (20m)	32.81ft (10m)	65.62ft (20m)	45.93ft (14m)	65.62ft (20m)	N/A	

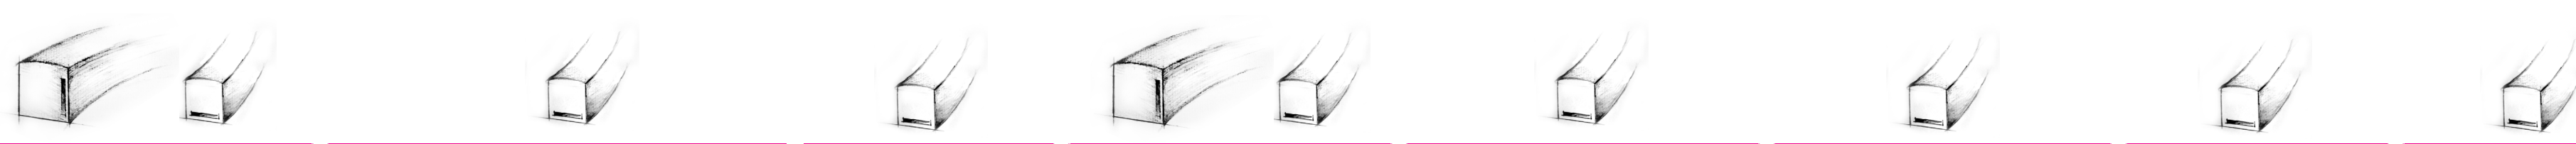

Fixture	Vivid Wave Static		Vivid Wave Pixel		Vivid Wave RGB	Vivid Wave Dynamic White	Vivid Wave 320 Static		Vivid Wave 320 Pixel		Vivid Wave 320 RGB	Vivid Wave 320 Dynamic White
	R/A	G/B/2200K-5700K	RGB	RGBW	RGB	W/WW	R/A	G/B/2200K-5700K	RGB	RGBW	RGB	W/WW
Colors												
Voltage	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC
Cutting Units	3.28in (83.3mm)	2.19in (55.6mm)	3.28in (83.3mm)	3.28in (83.3mm)	3.28in (83.3mm)	3.28in (83.3mm)	3.28in (83.3mm)	2.19in (55.6mm)	3.28in (83.3mm)	3.28in (83.3mm)	3.28in (83.3mm)	3.28in (83.3mm)
W/Ft (W/m)	2.19W/ft (7.2W/m)	3.66W/ft (12W/m)	5.03W/ft (16.5W/m)	6.71W/ft (22W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	2.19W/ft (7.2W/m)	3.66W/ft (12W/m)	5.03W/ft (16.5W/m)	6.71W/ft (22W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)
Dimensions	0.63in x 0.67in (16mm x 17mm)		0.63in x 0.67in (16mm x 17mm)		0.63in x 0.67in (16mm x 17mm)	0.63in x 0.67in (16mm x 17mm)	0.63in x 0.67in (16mm x 17mm)		0.63in x 0.67in (16mm x 17mm)	0.63in x 0.67in (16mm x 17mm)	0.63in x 0.67in (16mm x 17mm)	0.63in x 0.67in (16mm x 17mm)
Min. Bend Diameter	11.81in (300mm)		11.81in (300mm)		11.81in (300mm)	11.81in (300mm)	11.81in (300mm)		11.81in (300mm)	11.81in (300mm)	11.81in (300mm)	11.81in (300mm)
Bend Direction	Side	Top	Side	Top	Side	Top	Side	Top	Side	Top	Side	Top
Max Run Length	49.21ft (15m)	32.81ft (10m)	16.4ft (5m)	16.4ft (5m)	22.97ft (7m)	32.81ft (10m)	49.21ft (15m)	32.81ft (10m)	16.4ft (5m)	16.4ft (5m)	22.97ft (7m)	32.81ft (10m)
Double Feed	98.43ft (30m)	65.62ft (20m)	32.81ft (10m)	32.81ft (10m)	45.93ft (14m)	65.62ft (20m)	98.43ft (30m)	65.62ft (20m)	32.81ft (10m)	32.81ft (10m)	45.93ft (14m)	65.62ft (20m)