





# LED Neon FLEX


## Product Comparison Chart - SILICONE

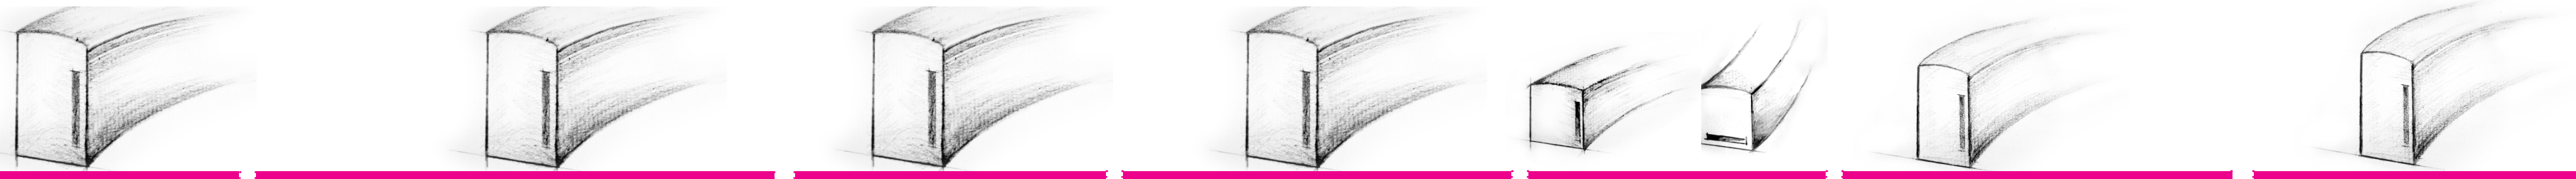

Fixture	Vivid S 160 Static		Vivid S 160 Pixel		Vivid S 160 RGB	Vivid S 160 Dynamic White	Vivid Wave Mini	Vivid Contour 12V		Vivid Contour 24V	
	R/A/	G/B/2200K-5700K	RGB	RGBW (2700K/4000K)	RGB	W/WW	R/A/G/B/W	R/A/	G/B/ (2200K-5700K)	R/A	G/B/ (2200K-5700K)
Colors	R/A/	G/B/2200K-5700K	RGB	RGBW (2700K/4000K)	RGB	W/WW	R/A/G/B/W	R/A/	G/B/ (2200K-5700K)	R/A	G/B/ (2200K-5700K)
Voltage	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	12V DC	12V DC	24V DC	24V DC
Cutting Units	4.92in (125mm)	3.28in (83.3mm)	4.92in (125mm)	4.92in (125mm)	3.94in (100mm)	3.28in (83.3mm)	3.28in (83.3mm)	1.64in (41.7mm)	1.64in (41.7mm)	4.92in (125mm)	3.28in (83.3mm)
W/Ft. (W/m)	2.19W/ft (7.2W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	4.57W/ft (15W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	1.37W/ft (4.5W/m)	1.37W/ft (4.5W/m)	1.37W/ft (4.5W/m)	1.07W/ft (3.5W/m)	1.37W/ft (4.5W/m)
Dimensions	0.45in x 0.83in (11.5mm x 21mm)		0.45in x 0.83in (11.5mm x 21mm)		0.45in x 0.83in (11.5mm x 21mm)	0.45in x 0.83in (11.5mm x 21mm)	0.39in x 0.39in (10mm x 10mm)	N/A	N/A	0.35in x 0.71in (9mm x 18mm)	
Min. Bend Diameter	4.72in (120mm)		4.72in (120mm)		4.72in (120mm)	4.72in (120mm)	3.94in (100mm)	N/A	N/A	3.54in (90mm)	
Bend Direction	Side		Side		Side	Side	Top	Side	Side	Side	
Max Run Length	65.62ft (20m)	49.21ft (15m)	49.21ft (15m)	32.81ft (10m)	32.81ft (10m)	49.21ft (15m)	49.21ft (15m)	N/A	N/A	98.43ft (30m)	98.43ft (30m)
Double Feed	131.23ft (40m)	98.43ft (30m)	98.43ft (30m)	65.62ft (20m)	65.62ft (20m)	98.43ft (30m)	98.43ft (30m)	N/A	N/A	196.85ft (60m)	196.85ft (60m)

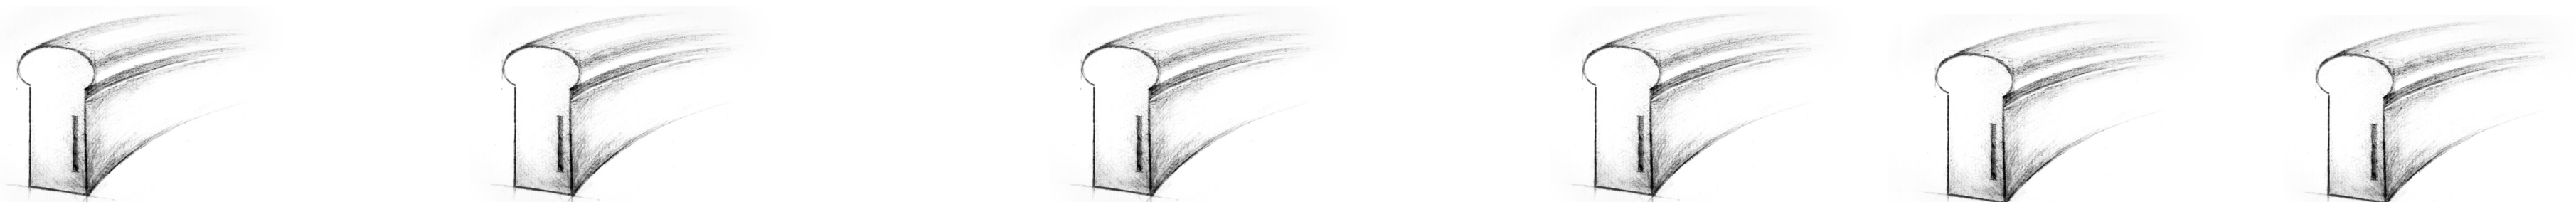

Fixture	Vivid Basic	Vivid S 270 Static		Vivid S 270 Pixel		Vivid S 270 RGB	Vivid S 270 Dynamic White	Landscape Flex
	-	R/A	G/B/ 2200K-5700K	RGB	RGBW	RGB	W/WW	-
Colors	-	R/A	G/B/ 2200K-5700K	RGB	RGBW	RGB	W/WW	-
Voltage	-	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	-
Cutting Units	-	4.92in (125mm)	3.28in (83.3mm)	4.92in (125mm)	4.92in (125mm)	3.94in (100mm)	3.28in (83.3mm)	-
W/Ft. (W/m)	-	2.19W/ft (7.2W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	4.57W/ft (15W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	-
Dimensions	-	0.45in x 1.14in (11.5mm x 29mm)		0.45in x 1.14in (11.5mm x 29mm)		0.45in x 1.14in (11.5mm x 29mm)	0.45in x 1.14in (11.5mm x 29mm)	-
Min. Bend Diameter	-	4.72in (120mm)		4.72in (120mm)		4.72in (120mm)	4.72in (120mm)	-
Bend Direction	-	Side		Side		Side	Side	-
Max Run Length	-	65.62ft (20m)	49.21ft (15m)	49.21ft (15m)	32.81ft (10m)	32.81ft (10m)	32.81ft (10m)	-
Double Feed	-	131.23ft (40m)	98.43ft (30m)	98.43ft (30m)	65.62ft (20m)	65.62ft (20m)	65.62ft (20m)	-

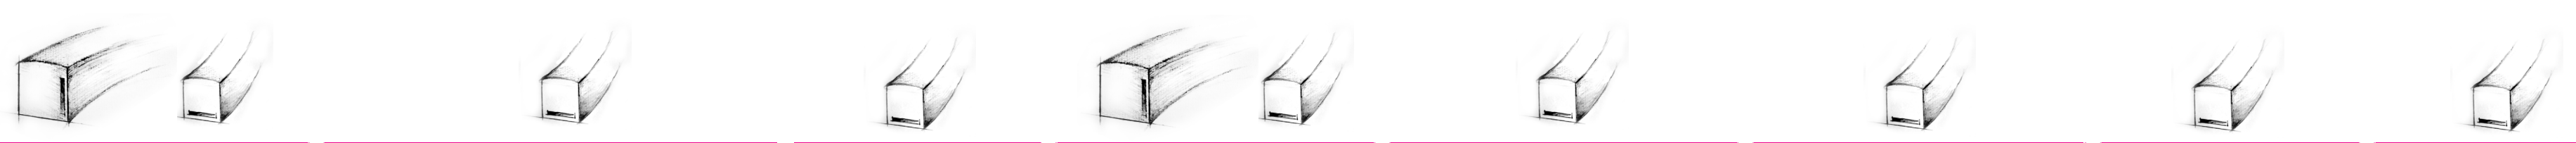

Fixture	Vivid Wave Static		Vivid Wave Pixel		Vivid Wave RGB	Vivid Wave Dynamic White	Vivid Wave 320 Static	Vivid Wave 320 Pixel	Vivid Wave 320 RGB	Vivid Wave 320 Dynamic White
	R/A	G/B/ 2200K-5700K	RGB	RGBW	RGB	W/WW	-	-	-	-
Colors	R/A	G/B/ 2200K-5700K	RGB	RGBW	RGB	W/WW	-	-	-	-
Voltage	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC	-	-	-	-
Cutting Units	3.28in (83.3mm)	2.19in (55.6mm)	3.28in (83.3mm)	3.28in (83.3mm)	3.28in (83.3mm)	3.28in (83.3mm)	-	-	-	-
W/Ft. (W/m)	2.19W/ft (7.2W/m)	3.66W/ft (12W/m)	5.03W/ft (16.5W/m)	6.71W/ft (22W/m)	3.66W/ft (12W/m)	3.66W/ft (12W/m)	-	-	-	-
Dimensions	0.63in x 0.67in (16mm x 17mm)		0.63in x 0.67in (16mm x 17mm)		0.63in x 0.67in (16mm x 17mm)	0.63in x 0.67in (16mm x 17mm)	-	-	-	-
Min. Bend Diameter	11.81in (300mm)		11.81in (300mm)		11.81in (300mm)	11.81in (300mm)	-	-	-	-
Bend Direction	Side		Side		Side	Side	-	-	-	-
Max Run Length	65.62ft (20m)	49.21ft (15m)	32.81ft (10m)	26.24ft (8m)	32.81ft (10m)	49.21ft (15m)	-	-	-	-
Double Feed	131.23ft (40m)	98.43ft (30m)	65.62ft (20m)	52.48ft (16m)	65.62ft (20m)	98.43ft (30m)	-	-	-	-

Specifications are subject to change without notice.

Version 1.4