



FRANCE
TRULUME
LED MODULES



24v @ 276 LM/FT
QUATTRO



12v @ 222 LM/FT
TRIO



12v @ 157 LM/FT
DUO



12v @ 117 LM/FT
UNO

COMING SOON!



COMING SOON!
NANO





MORE LIGHT. LESS POWER.



LOWER SYSTEM COST
GET 100 MODULES ON
1 (60W) POWER SUPPLY

HIGH PERFORMING OPTICS
SHALLOW, DEEP, SKINNY, OR
WIDE WE HAVE YOU COVERED

MAXIMUM EFFICIENCY
AVERAGE 150 LUMENS PER WATT
VERIFIED BY 3RD PARTY, INTERTEK




ASK YOUR DISTRIBUTOR OR OUR REPRESENTATIVE FOR MORE INFORMATION



FranceLighting.com
2268 Fairview Blvd.,
Fairview, TN 37062

U.S. & Canada Representative
SCOTT CUTCHER
scutcher@francelighting.com or 615.815.4128

Need Direct Support? Contact Tracy or Priscilla at 800.793.4793

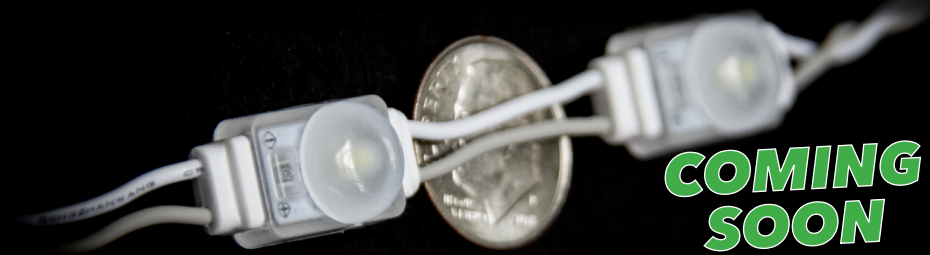

COMING SOON

CORE APPLICATIONS:
CHANNEL LETTERS
 > SMALL | SHALLOW | THIN
ACCENT & COVE LIGHTING
 SMALL MOLDED / ACRYLIC LETTERS



TINY BUT MIGHTY

Technical Specifications

Product Code	Temps / Colors	Lumen per Mod	Efficiency	Lumens Per Foot	Modules Per Foot	Power per Module / Foot	# Mods / Feet Per 60w Power Supply	Max. Serial Connection	Mods/Feet Per Bag
TBD	7100K	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
TBD	6500K	TBD	TBD	TBD	TBD				
TBD	4000K	TBD	TBD	TBD	TBD				
TBD	3000K	TBD	TBD	TBD	TBD				


Note: Custom Kelvin Temperatures Available Upon Request

Spacing & Usage Chart

Channel / Sign Depth	2"	3"	4"	5"
Single Row Spacing - Max Stoke	4"	6"	8"	10"
Multiple Row Spacing	3"	4"	6"	8"

Note: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic


Light Beam Pattern

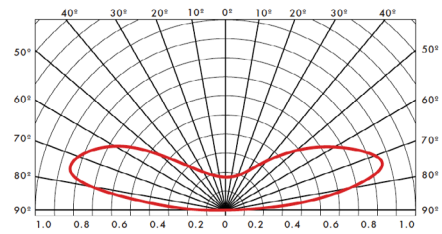

160° Lens

PDF Quick Links

- Clickable On PDF ONLY
- [MODULE SELECTION GUIDE](#)
- Product Video - Coming Soon

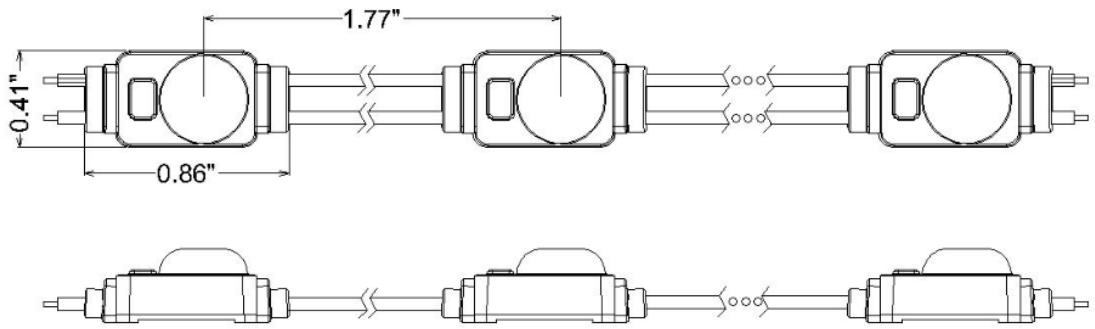

CORE APPLICATIONS:

- CHANNEL LETTERS
 - > SMALL | SHALLOW | THIN
- ACCENT LIGHTING
- COVE LIGHTING



GREAT LENS. SMALL BODY.

L 70
5+
years
LIFESPAN

7P / 7L
WARRANTY

IP67
DRY / DAMP / WET

-40°
~140°
OPERATING
TEMPERATURE

TOTAL SYSTEM
\$

MECHANICAL
FASTENING

EASY PEEL
3M
VHB
LINER

CCT RANGE
SINGLE BIN

TRU
CONSTANT
CURRENT

Technical Specifications

Product Code	Temps / Colors	Lumen per Mod	Efficiency	Lumens Per Foot	Modules Per Foot	Power per Module / Foot	# Mods / Feet Per 60w Power Supply	Max. Serial Connection	Mods/Feet Per Bag
U1-12V.36W7.1K	7100K	53	148 Lm/W	117	2.26	0.36 W {0.82 W ft.}	166 Mods {73 feet}	45 mods {19 feet}	135 Mods {59 feet}
U1-12V.36W6.5K	6500K	53	148 Lm/W	117	2.26				
U1-12V.36W4.0K	4000K	53	148 Lm/W	117	2.26				
U1-12V.36W3.0K	3000K	53	148 Lm/W	117	2.26				


Note: Custom Kelvin Temperatures Available Upon Request

Spacing & Usage Chart

Channel / Sign Depth	2"	3"	4"	5"
Single Row Spacing - Max Stoke	6"	7"	8"	10"
Multiple Row Spacing	4"	5"	6"	8"

Note: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic

Light Beam Pattern

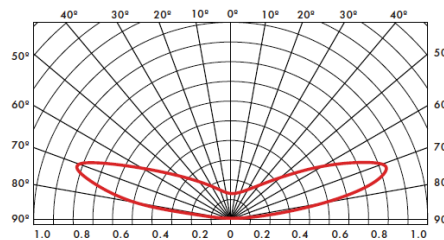


170° Lens

Web Links

Clickable On PDF ONLY

[MODULE SELECTION GUIDE](#)

Product Video - Coming Soon

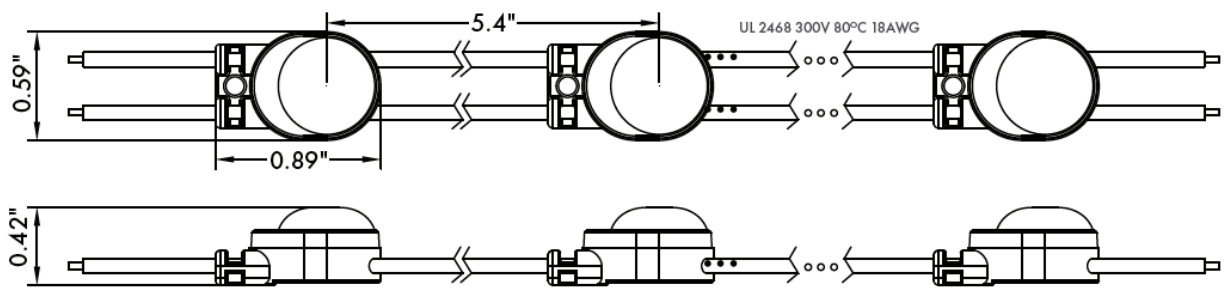

DUO



170°
OPTICS

CORE APPLICATIONS:

- CHANNEL LETTERS
 - > STANDARD | SHALLOW | WIDE
- ACCENT & COVE LIGHTING
- SHALLOW CABINET / BOX SIGNS



YOUR EVERYDAY WORKHORSE

L 70
5+
years
LIFESPAN

7P/7L
WARRANTY

IP67
DRY / DAMP / WET

-40°
~140°
OPERATING
TEMPERATURE

TOTAL SYSTEM
\$

MECHANICAL
FASTENING

EASY PEEL
3M
VHB
LINER

CCT RANGE
SINGLE BIN

TRU
CONSTANT
CURRENT

Technical Specifications

Product Code	Temps / Colors	Lumen per Mod	Efficiency	Lumens Per Foot	Modules Per Foot	Power per Module / Foot	# Mods / Feet Per 60w Power Supply	Max. Serial Connection	Mods/Feet Per Bag
U2-12V.6W7.1K	7100K	93	155 Lm/W	157	1.69	0.60 W {1.0 W ft.}	100 Mods {59 feet}	40 mods {23 feet}	80 Mods {47 feet}
U2-12V.6W6.5K	6500K	93	155 Lm/W	157	1.69				
U2-12V.6W4.0K	4000K	93	155 Lm/W	157	1.69				
U2-12V.6W3.0K	3000K	93	155 Lm/W	157	1.69				


Note: Custom Kelvin Temperatures Available Upon Request

Spacing & Usage Chart

Channel / Sign Depth	2"	3"	4"	5"
Single Row Spacing - Max Stoke	*	10"	12"	14"
Multiple Row Spacing	*	8"	10"	12"

Notes: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic. * Performs well at this depth if you decrease module spacing.



Light Beam Pattern

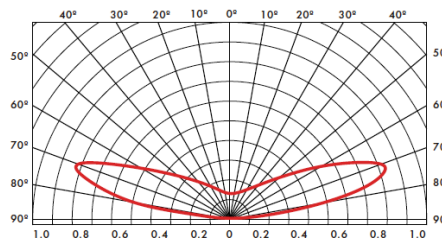

170° Lens

Web Links

- Clickable On PDF ONLY
- [MODULE SELECTION GUIDE](#)
- Product Video - Coming Soon

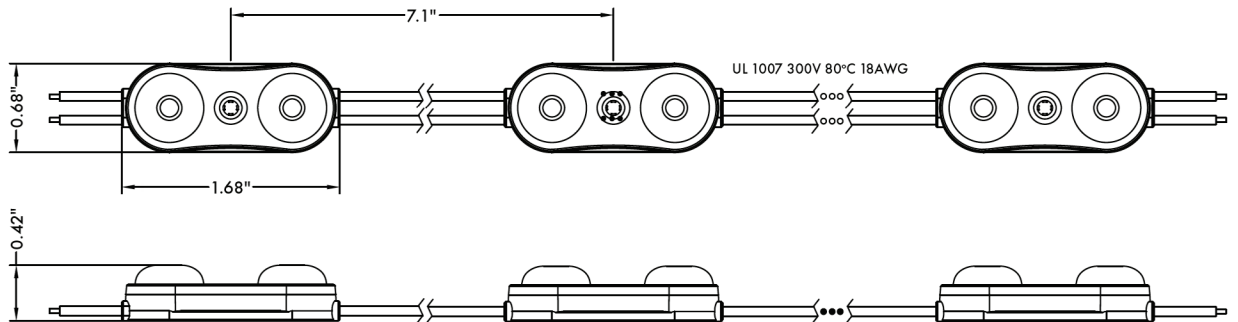

FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

TRIO

FRANCE
TRU LUME

LED MODULES

170°
OPTICS



CORE APPLICATIONS:

CHANNEL LETTERS

> STANDARD | SHALLOW | WIDE | DEEP

CABINET / BOX SIGNS

> STANDARD | SHALLOW | CLOUD

ACCENT & COVE LIGHTING

THE DUO'S BIG BROTHER

L70 5+ years LIFESPAN	7P/7L WARRANTY	IP67 DRY / DAMP / WET	-40° 140° OPERATING TEMPERATURE	TOTAL SYSTEM \$	MECHANICAL FASTENING	EASY PEEL 3M VHB LINER	CCT RANGE SINGLE BIN	TRU CONSTANT CURRENT
---------------------------------------	--------------------------	---------------------------------	--	---------------------------	--------------------------------	--	--------------------------------	-----------------------------------

Technical Specifications

Product Code	Temps / Colors	Lumen per Mod	Efficiency	Lumens Per Foot	Modules Per Foot	Power per Module / Foot	# Mods / Feet Per 60w Power Supply	Max. Serial Connection	Mods/Feet Per Bag
U3-12V.96W7.1K	7100K	148	154 Lm/W	222	1.5	0.96 W {1.44 W ft.}	60 Mods {40 feet}	25 mods {16 feet}	50 Mods {33 feet}
U3-12V.96W6.5K	6500K	148	154 Lm/W	222	1.5				
U3-12V.96W4.0K	4000K	148	154 Lm/W	222	1.5				
U3-12V.96W3.0K	3000K	148	154 Lm/W	222	1.5				


Note: Custom Kelvin Temperatures Available Upon Request

Spacing & Usage Chart

Channel / Sign Depth	2"	3"	4"	5"
Single Row Spacing - Max Stroke	N/A	10"	12"	14"
Multiple Row Spacing	N/A	9"	11"	13"

Note: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic

Light Beam Pattern

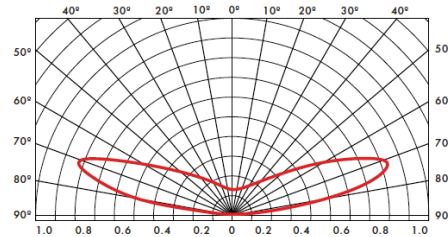


170° Lens

PDF Links

Clickable On PDF ONLY

[MODULE SELECTION GUIDE](#)

Product Video - Coming Soon

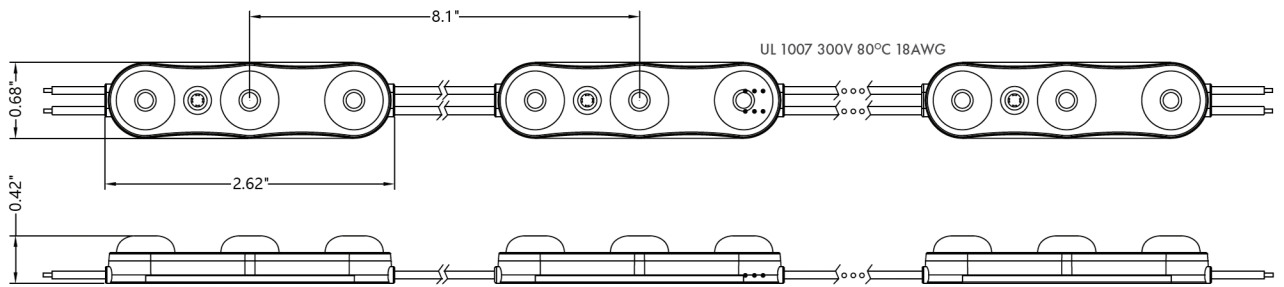

FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

QUATTRO



170°
OPTICS



CORE APPLICATIONS:

CHANNEL LETTERS

> WIDE | DEEP

CABINET / BOX SIGNS

> STANDARD | CLOUD

ACCENT & COVE LIGHTING



THE 24V POWERHOUSE

- L 70**

5+
years
LIFESPAN
- 7P/7L**
WARRANTY
- IP67**
DRY / DAMP / WET
- 40°**
~140°
OPERATING TEMPERATURE
- TOTAL SYSTEM**
- MECHANICAL**

FASTENING
- EASY PEEL**

3M VHB LINER
- CCT RANGE**

SINGLE BIN
- CONSTANT CURRENT**

Technical Specifications

Product Code	Temps / Colors	Lumen per Mod	Efficiency	Lumens Per Foot	Modules Per Foot	Power per Module / Foot	# Mods / Feet Per 100w Power Supply	Max. Serial Connection	Mods/Feet Per Bag
U4.24V1.2W7.1K	7100K	184	153 Lm/W	276	1.5	1.2 W {1.80 W ft.}	80 Mods {53 feet}	40 mods {26 feet}	80 Mods {53 feet}
U4.24V1.2W6.5K	6500K	184	153 Lm/W	276	1.5				
U4.24V1.2W4.0K	4000K	184	153 Lm/W	276	1.5				
U4.24V1.2W3.0K	3000K	184	153 Lm/W	276	1.5				


Note: Custom Kelvin Temperatures Available Upon Request

Spacing & Usage Chart

Channel / Sign Depth	3"	4"	5"	6"
Single Row Spacing - Max Stoke	10"	12"	14"	14"
Multiple Row Spacing	8"	10"	12"	12"

Note: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic

Light Beam Pattern

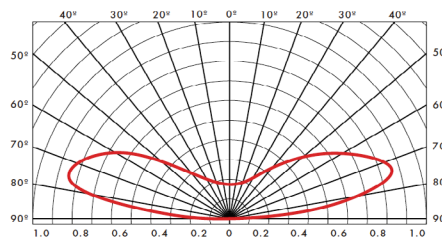


170° Lens

Quick Links

Clickable On PDF ONLY

[MODULE SELECTION GUIDE](#)

Product Video - Coming Soon

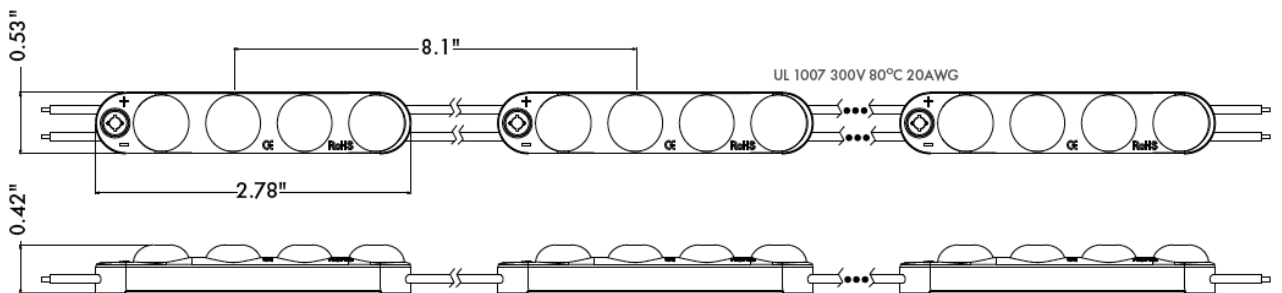

FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

LED MODULES SELECTION GUIDE

CLICK ON THE ICONS BELOW TO NAVIGATE THE SELECTION GUIDE



ILLUMINATED LETTERS



BOX & CLOUD SIGNS



MONUMENT & CABINET SIGNS



ARCHITECTURAL & ACCENT LIGHTING



ILLUMINATED LETTERS

LED MODULES APPLICATION CHART

MODULE MODEL	STANDARD CHANNEL LETTERS	SHALLOW CHANNEL LETTERS	DEEP CHANNEL LETTERS	WIDE CHANNEL LETTERS	THIN CHANNEL LETTERS	HALO LIT CHANNEL LETTERS	HALO LIT ROUTED LETTERS	SMALL MOLDED & ACRYLIC LETTERS (I.E. GEMINI)
Coming Soon NANO	☹️	😊	☹️	☹️	😊	😊	😊	😊
UNO	😊	😊	☹️	😊	😊	😊	😊	😊
DUO	😊	😊	☹️	😊	☹️	😊	😊	☹️
TRIO	😊	😊	😊	😊	☹️	😊	☹️	☹️
QUATTRO	😊	☹️	😊	😊	☹️	😊	☹️	☹️

😊 YES ☹️ NO 😊 NOT OPTIMAL - REQUIRES ADJUSTMENTS AND OR GUIDANCE FROM FRANCE

LED MODULES COMPARISON CHART - WHITE

MODULE MODEL	VOLTAGE	POWER TYPE	TEMP/ COLORS	OPTICS	I.P. RATING	LUMENS PER WATT	LIGHT OUTPUT	MODS PER FOOT	WATTS PER MOD	WATTS PER FOOT	MODS PER STRING	MAX MODS IN SERIES	MODS PER 12V / 60W OR 24v / 100W P.S.
Coming Soon NANO	12v	Constant Voltage	7100K 6500K 4000K 3000K	160°	67	TBD	TBD PER MOD TBD PER FT.	TBD	TBD	TBD	TBD	TBD	TBD
UNO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	148	53 LM PER MOD 117 LM PER FT.	2.26	.36w	.82w	45	45	166
DUO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	155	93 LM PER MOD 157 LM PER FT.	1.69	.6w	1.0w	40	40	100
TRIO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	154	148 LM PER MOD 222 LM PER FT.	1.5	.96w	1.44w	25	25	60
QUATTRO	24v	Constant Current	7100K 6500K 4000K 3000K	170°	67	153	184 LM PER MOD 276 LM PER FT.	1.5	1.2w	1.8w	40	40	80

THE UNO, DUO, AND TRIO COME IN RED. GREEN AND BLUE WILL BE AVAILABLE IN 2021. [CLICK TO SEE COMPARISON](#)



FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

LED MODULES SELECTION GUIDE



CLICK ON THE ICONS BELOW TO NAVIGATE THE SELECTION GUIDE



ILLUMINATED LETTERS COLORS

COLOR LED MODULES APPLICATIONS GUIDE

MODULE MODEL	STANDARD CHANNEL LETTERS	SHALLOW CHANNEL LETTERS	DEEP CHANNEL LETTERS	WIDE CHANNEL LETTERS	THIN CHANNEL LETTERS	HALO LIT CHANNEL LETTERS	HALO LIT ROUTED LETTERS	SMALL MOLDED & ACRYLIC LETTERS (I.E. GEMINI)
Coming Soon NANO	☹️	😊	☹️	☹️	😊	😊	😊	😊
UNO	😊	😊	☹️	😊	😊	😊	😊	😊
DUO	😊	😊	☹️	😊	☹️	😊	😊	☹️
TRIO	😊	😊	😊	😊	☹️	😊	☹️	☹️

😊 YES ☹️ NO 😊 NOT OPTIMAL - REQUIRES ADJUSTMENTS AND OR GUIDANCE FROM FRANCE

COLOR LED MODULES COMPARISON CHART - COLORS

MODULE MODEL	VOLTAGE	POWER TYPE	TEMP/COLORS	OPTICS	I.P. RATING	LUMENS PER WATT	LIGHT OUTPUT	MODS PER FOOT	WATTS PER MOD	WATTS PER FOOT	MODS PER STRING	MAX MODS IN SERIES	MODS PER 12V / 60W P.S.
Coming Soon NANO	12v	Constant Voltage	RED / TBD GREEN / TBD BLUE / TBD	160°	67	TBD	TBD PER MOD TBD PER FT.	TBD	TBD	TBD	TBD	TBD	TBD
UNO	12v	Constant Current	RED / 622.5 nm GREEN / TBD BLUE / TBD	170°	67	148	15 LM PER MOD 33.9 LM PER FT.	2.26	.36w	.82w	45	45	166
DUO	12v	Constant Current	RED / 622.5 nm GREEN / TBD BLUE / TBD	170°	67	155	30 LM PER MOD 50.7 LM PER FT.	1.69	.6w	1.0w	40	40	100
TRIO	12v	Constant Current	RED / 622.5 nm GREEN / TBD BLUE / TBD	170°	67	154	45 LM PER MOD 67.5 LM PER FT.	1.5	.96w	1.44w	25	25	60



FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

LED MODULES SELECTION GUIDE



CLICK ON THE ICONS BELOW TO NAVIGATE THE SELECTION GUIDE



BOX & CLOUD SIGNS

LED MODULES APPLICATIONS GUIDE

MODULE MODEL	STANDARD 5" - 8" DEPTH	SHALLOW 3" - 5" DEPTH	DEEPER 9" - 12" DEPTH	APPLICATION NOTES
DUO	☹️	😊	☹️	IF SPACING BETWEEN MODULE IS DECREASED A 2" DEPTH IS POSSIBLE
TRIO	😊	😊	☹️	PAST A 6" DEPTH THE TRIO MAY NOT PROVIDE THE DESIRED BRIGHTNESS
QUATTRO	😊	☹️	😊	THE QUATTRO WAS BUILT FOR THIS TYPE OF APPLICATION



LED MODULES COMPARISON CHART - WHITE

MODULE MODEL	VOLTAGE	POWER TYPE	TEMP/ COLORS	OPTICS	I.P. RATING	LUMENS PER WATT	LIGHT OUTPUT	MODS PER FOOT	WATTS PER MOD	WATTS PER FOOT	MODS PER STRING	MAX MODS IN SERIES	MODS PER 12V / 60W OR 24v / 100W P.S.
DUO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	155	93 LM PER MOD 157 LM	1.69	.6w	1.0w	40	40	100
TRIO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	154	148 LM PER MOD 222 LM PER FT.	1.5	.96w	1.44w	25	25	60
QUATTRO	24v	Constant Current	7100K 6500K 4000K 3000K	170°	67	153	184 LM PER MOD 276 LM PER FT.	1.5	1.2w	1.8w	40	40	80



FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

LED MODULES SELECTION GUIDE

CLICK ON THE ICONS BELOW TO NAVIGATE THE SELECTION GUIDE



ILLUMINATED LETTERS



BOX & CLOUD SIGNS



MONUMENT & CABINET SIGNS



ARCHITECTURAL & ACCENT LIGHTING



MONUMENTS & CABINETS

LED MODULES APPLICATIONS GUIDE

TRULUME MODULE MODEL	STANDARD DOUBLE SIDED 12" - 18" DEPTH	SHALLOW DOUBLE SIDED 6" - 11" DEPTH	DEEP DOUBLE SIDED 18" - 24" DEPTH	APPLICATION NOTES <i>PRODUCTS NEED MOUNTED TO YOUR EXTRUSION OF CHOICE</i>
TRIO	☹️	☹️	☹️	6" - 8" DEPTHS REQUIRES PULLING THE MODULES IN TIGHTER
QUATTRO	😊	☹️	😊	18" OR DEEPER REQUIRES PULLING THE MODULES IN TIGHTER

😊 YES

☹️ NO

☹️ NOT OPTIMAL - REQUIRES ADJUSTMENTS AND OR GUIDANCE FROM FRANCE

LED MODULES COMPARISON CHART - WHITE

MODULE MODEL	VOLTAGE	POWER TYPE	TEMP/ COLORS	OPTICS	I.P. RATING	LUMENS PER WATT	LIGHT OUTPUT	MODS PER FOOT	WATTS PER MOD	WATTS PER FOOT	MODS PER STRING	MAX MODS IN SERIES	MODS PER 12V / 60W OR 24v / 100W P.S.
TRIO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	154	148 LM PER MOD 222 LM PER FT.	1.5	.96w	1.44w	25	25	60
QUATTRO	24v	Constant Current	7100K 6500K 4000K 3000K	170°	67	153	184 LM PER MOD 276 LM PER FT.	1.5	1.2w	1.8w	40	40	80

LED MODULES DYI DOUBLE SIDED STICK INSTALLATION GUIDE

TRULUME QUATTRO DYI INSTALLATION GUIDE > DOUBLE SIDED

T 12 SIZES >	18"	24"	30"	36"	42"	48"	60"	64"	72"	84"	96"	108"	117"	120"
MODULES PER DOUBLE SIDED STICK	6	6	8	10	12	12	16	18	18	22	24	28	30	30
LUMENS PER DOUBLE SIDED STICK	1104	1104	1472	1840	2208	2208	2944	3312	3312	4048	4416	5152	5520	5520
# OF STICKS ON A 24V / 100W P.S	13	13	10	8	6.5	6.5	5	4	4	3.5	3	2.5	2.5	2.5

TRULUME TRIO DYI INSTALLATION GUIDE FOR DEPTH RANGE OF 9" - 11" > DOUBLE SIDED

T 12 SIZES >	18"	24"	30"	36"	42"	48"	60"	64"	72"	84"	96"	108"	117"	120"
MODULES PER DOUBLE SIDED STICK	6	6	8	10	12	12	16	18	18	22	24	28	30	30
LUMENS PER DOUBLE SIDED STICK	888	888	1184	1480	1776	1776	2368	2664	2664	3256	3552	4144	4440	4440
# OF STICKS ON A 12V / 120W P.S.	20.5	20.5	15.5	12.5	10	10	7.5	6.5	6.5	5.5	5	4	4	4



FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

CORNBULB / SIGN KIT SELECTION GUIDE

CLICK ON THE ICONS BELOW TO NAVIGATE THE SELECTION GUIDE



ILLUMINATED LETTERS



BOX & CLOUD SIGNS



MONUMENT & CABINET SIGNS



ARCHITECTURAL & ACCENT LIGHTING



MONUMENTS & CABINETS
ULTRA DEEP

CORNBULB / SIGN KIT APPLICATIONS CHART

CORNBULB MODEL	TRUBRITE CORNBULBS	ULTRA DEEP DOUBLE SIDED MIN. OF 28" DEEP	ULTRA DEEP DOUBLE SIDED MIN. OF 30" DEEP	ULTRA DEEP DOUBLE SIDED MIN. OF 33" DEEP	ULTRA DEEP DOUBLE SIDED MIN. OF 36" DEEP
MGLED -54W	54W	😊	😞	😞	😞
MGLED -75W	75W	😞	😊	😞	😞
MGLED -100W	100W	😞	😞	😊	😞
MGLED -120W	120W	😞	😞	😞	😊



YES



NO



NOT OPTIMAL - REQUIRES ADJUSTMENTS AND OR GUIDANCE FROM FRANCE

CORNBULB COMPARISON CHART

TRUBRITE GEN II - 5000K CORNBULBS

CORNBULB MODEL	WATTAGE	RATED CURRENT	HID EQUIVALENT	CFL EQUIVALENT	LUMEN OUTPUT	# OF LEDS	MOGUL CONNECTION	WEIGHT
MGLED -54W	54W	0.54A	175W - 200W	105W	7020 lm	195 pcs	E39	2.64 lbs
MGLED -75W	75W	0.75A	200W - 250W	150W	9750 lm	234 pcs	E39	3.17 lbs
MGLED -100W	100W	1.0A	250W - 320W	200W	13000 lm	416 pcs	E39	3.96 lbs
MGLED -120W	120W	1.2A	320W - 400W	250W	15600 lm	507 pcs	E39	4.40 lbs

CORNBULBS INSTALLATION GUIDE

TRUBRITE CORNBULB / SIGN KITS GUIDE > DOUBLE SIDED

CORNBULB / SIGN KIT WATTAGE	54W	75W	100W	120W
RECOMMENDED CABINET DEPTH	28"	30"	33"	36"
RECOMMENDED LAMP TO LAMP SPACING	30"	36"	42"	48"
# OF LAMPS IN A 12FT. X 12FT. CABINET	23	16	12	9

COMING SOON



[CLICK HERE TO DOWNLOAD FRANCE TRUBRITE CORNBULBS / SIGN KIT SPEC SHEET](#)



FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

LED MODULES SELECTION GUIDE

CLICK ON THE ICONS BELOW TO NAVIGATE THE SELECTION GUIDE



ILLUMINATED LETTERS



BOX & CLOUD SIGNS



MONUMENT & CABINET SIGNS



ARCHITECTURAL & ACCENT LIGHTING



ARCHITECTURAL & ACCENT LIGHTING

MODULES APPLICATIONS CHART

MODULE MODEL	COVE LIGHTING	HALO LIGHTING	BUILDING ACCENTS	NEON REPLACEMENT	AVAILABLE IN RED, GREEN & BLUE	APPLICATION NOTES
Coming Soon NANO	😊	😊	SEE FRANCE FLEXX CURV		😊	WITH THE AMOUNT OF VARIABLES TO CONSIDER WHEN SELECTING THE RIGHT LIGHT SOURCE FOR THESE TYPES OF PROJECTS, WE HIGHLY ENCOURAGE YOU TO CONTACT A FRANCE LED SPECIALIST.
UNO	😊	😊	SEE FRANCE FLEXX CURV		😊	
DUO	😊	😊	SEE FRANCE FLEXX CURV		😊	
TRIO	😊	😊	SEE FRANCE FLEXX CURV		😊	
QUATTRO	😊	😊	SEE FRANCE FLEXX CURV		😞	



YES



NO



NOT OPTIMAL - REQUIRES ADJUSTMENTS AND OR GUIDANCE FROM FRANCE

MODULES COMPARISON CHART - WHITE

MODULE MODEL	VOLTAGE	POWER TYPE	TEMP/ COLORS	OPTICS	I.P. RATING	LUMENS PER WATT	LIGHT OUTPUT	MODS PER FOOT	WATTS PER MOD	WATTS PER FOOT	MODS PER STRING	MAX MODS IN SERIES	MODS PER 12V / 60W OR 24v / 100W P.S.
Coming Soon NANO	12v	Constant Voltage	7100K 6500K 4000K 3000K	160°	67	TBD	TBD PER MOD TBD PER FT.	TBD	TBD	TBD	TBD	TBD	TBD
UNO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	148	53 LM PER MOD 117 LM PER FT.	2.26	.36w	.82w	45	45	166
DUO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	155	93 LM PER MOD 157 LM PER FT.	1.69	.6w	1.0w	40	40	100
TRIO	12v	Constant Current	7100K 6500K 4000K 3000K	170°	67	154	148 LM PER MOD 222 LM PER FT.	1.5	.96w	1.44w	25	25	60

THE UNO, DUO, AND TRIO COME IN RED. GREEN AND BLUE WILL BE AVAILABLE IN 2021. [CLICK TO SEE COMPARISON](#)



FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

LED MODULES SELECTION GUIDE

CLICK ON THE ICONS BELOW TO NAVIGATE THE SELECTION GUIDE



ILLUMINATED LETTERS



BOX & CLOUD SIGNS



MONUMENT & CABINET SIGNS



ARCHITECTURAL & ACCENT LIGHTING



ARCHITECTURAL & ACCENT LIGHTING
COLORS

COLOR LED MODULES APPLICATIONS CHART

MODULE MODEL	COVE LIGHTING	HALO LIGHTING	BUILDING ACCENTS	NEON REPLACEMENT	AVAILABLE IN RED, GREEN & BLUE	APPLICATION NOTES
Coming Soon NANO	😊	😊	SEE FRANCE FLEXX CURV		😊	WITH THE AMOUNT OF VARIABLES TO CONSIDER WHEN SELECTING THE RIGHT LIGHT SOURCE FOR THESE TYPES OF PROJECTS, WE HIGHLY ENCOURAGE YOU TO CONTACT A FRANCE LED SPECIALIST.
UNO	😊	😊	SEE FRANCE FLEXX CURV		😊	
DUO	😊	😊	SEE FRANCE FLEXX CURV		😊	
TRIO	😊	😊	SEE FRANCE FLEXX CURV		😊	
QUATTRO	😊	😊	SEE FRANCE FLEXX CURV		😞	

😊 YES

😞 NO

😐 NOT OPTIMAL - REQUIRES ADJUSTMENTS AND OR GUIDANCE FROM FRANCE

COLOR LED MODULES COMPARISON CHART - COLORS

MODULE MODEL	VOLTAGE	POWER TYPE	TEMP/COLORS	OPTICS	I.P. RATING	LUMENS PER WATT	LIGHT OUTPUT	MODS PER FOOT	WATTS PER MOD	WATTS PER FOOT	MODS PER STRING	MAX MODS IN SERIES	MODS PER 12V / 60W P.S.
Coming Soon NANO	12v	Constant Voltage	RED / TBD GREEN / TBD BLUE / TBD	160°	67	TBD	TBD PER MOD TBD PER FT.	TBD	TBD	TBD	TBD	TBD	TBD
UNO	12v	Constant Current	RED / 622.5 nm GREEN / TBD BLUE / TBD	170°	67	148	15 LM PER MOD 33.9 LM PER FT.	2.26	.36w	.82w	45	45	166
DUO	12v	Constant Current	RED / 622.5 nm GREEN / TBD BLUE / TBD	170°	67	155	30 LM PER MOD 50.7 LM PER FT.	1.69	.6w	1.0w	40	40	100
TRIO	12v	Constant Current	RED / 622.5 nm GREEN / TBD BLUE / TBD	170°	67	154	45 LM PER MOD 67.5 LM PER FT.	1.5	.96w	1.44w	25	25	60

[CLICK HERE TO DOWNLOAD FRANCE FLEXX CURV SPEC SHEET](#)



FRANCE TRULUME LED MODULES NAVIGATION

[12v NANO](#) | [12v UNO](#) | [12v DUO](#) | [12v TRIO](#) | [24v QUATTRO](#)

FranceLighting.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062